




Technical data

CODE	LAMP	TEMPERATURE CLASS ( GAS )	TEMPERATURE CLASS ( DUSTS )	LAMPHOLDER SIZE	CABLE ENTRY SIZE	DETAIL
<b>LIGHTING FIXTURE FOR INCANDESCENT LAMP* - POWER SUPPLY 230V-50Hz</b>						
RCDE500I	500 W	T2	T230°C	E-40	1x3/4"	A
RCDE500I	300 W	T3	T160°C	E-40	1x3/4"	A
*lamp not included.						
<b>LIGHTING FIXTURE FOR BLENDED LIGHT LAMP - POWER SUPPLY 230V 50Hz</b>						
RCDE500MLL	500 W	T3 / T2	T200°C / T230°C	E-40	1x3/4"	A
<b>LIGHTING FIXTURE FOR BLENDED LIGHT LAMP - POWER SUPPLY 230V 50Hz</b>						
RCDE250HG	250 W	T3	T160°C	E-40	2x3/4"	B
RCDE400HG	400 W	T3	T200°C	E-40	2x3/4"	B
<b>LIGHTING FIXTURE FOR HIGH PRESSURE SODIUM LAMP - POWER SUPPLY 230V 50Hz</b>						
RCDE250NA	250 W	T4 / T3	T135°C / T160°C	E-40	2x3/4"	B
RCDE400NA	400 W	T3	T200°C	E-40	2x3/4"	B
<b>LIGHTING FIXTURE FOR METAL HALIDE LAMP - POWER SUPPLY 230V 50Hz</b>						
RCDE250MH	250 W	T4 / T3	T135°C / T160°C	E-40	2x3/4"	B
RCDE400MH	400 W	T3	T200°C	E-40	2x3/4"	B

Technical features




CODE	A [mm]	B [mm]	C [mm]	D [mm]	WIGHT [Kg]	CABLE ENTRY	DETAIL
RCDE500I	535	370	376	-	21,00	1 x 3/4"	A
RCDE250HG	535	370	406	700	29,00	2 x 3/4"	B
RCDE400HG	535	370	406	700	29,50	2 x 3/4"	B
RCDE250NA	535	370	406	700	31,00	2 x 3/4"	B
RCDE400NA	535	370	406	700	31,50	2 x 3/4"	B
RCDE250MH	535	370	406	700	26,50	2 x 3/4"	B
RCDE400MH	535	370	406	700	31,50	2 x 3/4"	B

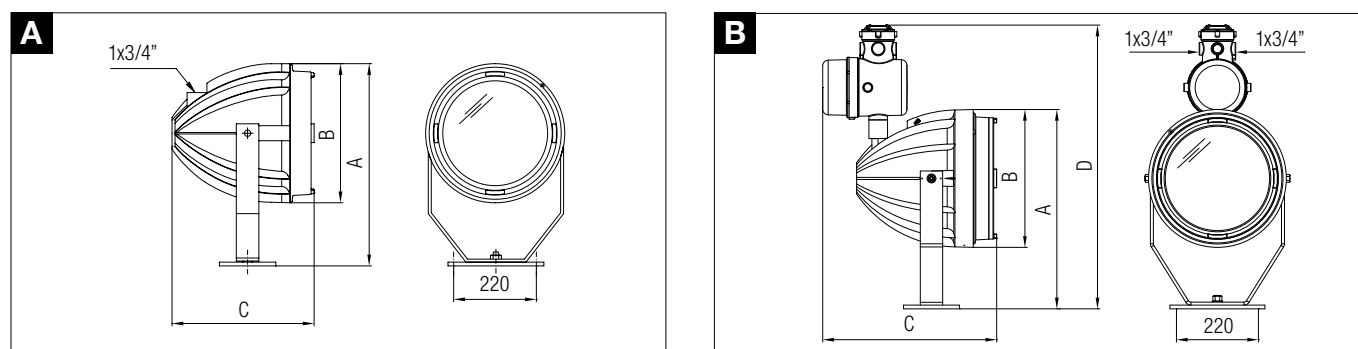

RCDE250MH

RCDE250HG

RCDE400NA

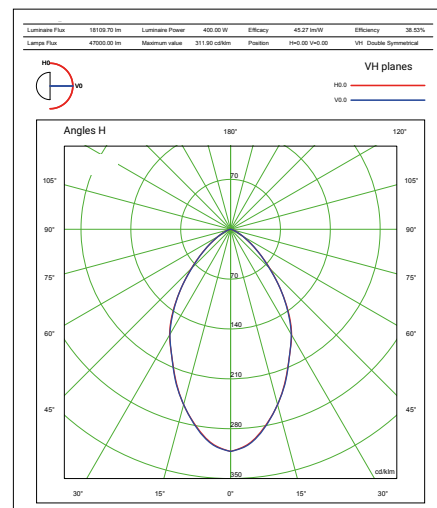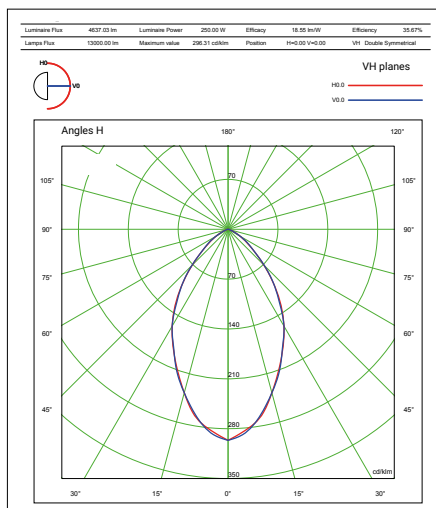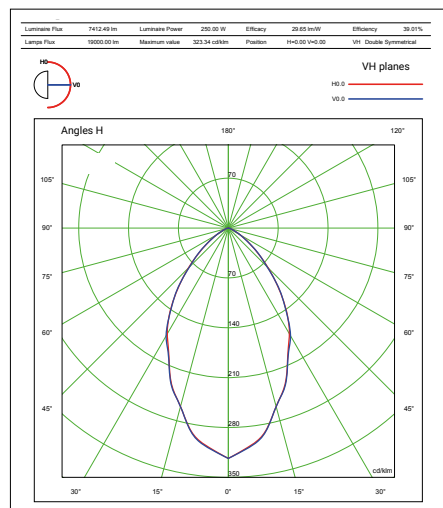

REMARK:

Due to the development of the national and international specifications and of the technology, the above technical characteristics showed on this bulletin can be considered as binding on our confirmation only.