



**Installation:** Safe Area

**Classification:** I



**LIGHTING FIXTURES**

**CEI / EN**

EXECUTION	INDUSTRIAL WEATHERPROOF
RULES OF COMPLIANCE	EN 60598-1 + A1; EN 60598-2-1
EC Type-Examination Certificate	-
PROTECTION DEGREE	IP66
AMBIENT TEMPERATURE	-40°C ÷ +70°C

**Mechanical characteristics**

Body & frame	stainless steel AISI-304 one piece deep drawn
Diffuser	transparent tempered flat glass 5mm thick. with silicon rubber gasket
Screws	stainless steel
Gaskets	EPDM rubber suitable for high temperatures and resistant to enviroments conditions
Reflector	internal in die-fold steel, epoxy powders white coloured coated equiped with security strings
Cable entry	PG 13,5 complete with poliamyde cable gland
Closing hooks	stainless steel with screw-held spring lock latches and anti-vandal device

**Electrical characteristics**

Power supply	electronic ballast 230V - 50/60Hz p.f. corrected (cos p ≥ 0,98)
Lampholders	bi-pin G13 cap
Internal wiring	high-temperature resistant silicon rubber insulation cables
Terminals	suitable up to 4sq/mm cables



**On Request Accessories:**

- Pole mounting kit complete with stainless steel hardware
- Pendant mounting kit complete with stainless steel hardware
- Wall/structure mounting kit complete with stainless steel hardware
- Emergency unit complete with inverter charger and Ni-Cd 4,8V 4A/h battery pack
- Electronic ballast with voltage supply different than standard


**Technical data**

CODE	LAMP TYPE	TEMPERATURE CLASS (GAS)	TEMPERATURE CLASS (DUSTS)	LAMPHOLDER	CABLE ENTRY	EMERG.UNIT (ON REQUEST)	AUTONOMY (EMERG.UNIT)	DETAIL
<b>FLUORESCENT LIGHTING FIXTURES FOR SINGLE, TWIN, AND THREE LAMPS - POWER SUPPLY 230V-50/60Hz</b>								
GENIUS118	1 x 18W	-	-	G13	1 x PG 13.5	4,8V - 4A/h	3h	A
GENIUS136	1 x 36W	-	-	G13	1 x PG 13.5	4,8V - 4A/h	3h	A
GENIUS158	1 x 58W	-	-	G13	1 x PG 13.5	4,8V - 4A/h	3h	A
GENIUS218	1 x 18W	-	-	G13	1 x PG 13.5	4,8V - 4A/h	3h	A
GENIUS236	2 x 36W	-	-	G13	1 x PG 13.5	4,8V - 4A/h	3h	A
GENIUS258	2 x 58W	-	-	G13	1 x PG 13.5	4,8V - 4A/h	3h	A
GENIUS318	3 x 18W	-	-	G13	1 x PG 13.5	4,8V - 4A/h	3h	A
GENIUS336	3 x 36W	-	-	G13	1 x PG 13.5	4,8V - 4A/h	3h	A

**Technical features**

CODE	A [mm]	B [mm]	C [mm]	D [mm]	WEIGHT [Kg]	CABLE ENTRY	DETAIL
GENIUS118	700	220	90	480	12,50	1 x PG 13,5	A
GENIUS136	1310	220	90	1090	15,50	1 x PG 13,5	A
GENIUS158	1610	220	90	1390	18,50	1 x PG 13,5	A
GENIUS218	700	220	90	480	13,00	1 x PG 13,5	A
GENIUS236	1310	220	90	1090	16,00	1 x PG 13,5	A
GENIUS258	1610	220	90	1390	19,00	1 x PG 13,5	A
GENIUS318	700	220	90	1090	13,50	1 x PG 13,5	A
GENIUS336	1310	220	90	1390	16,50	1 x PG 13,5	A

**Reference details**

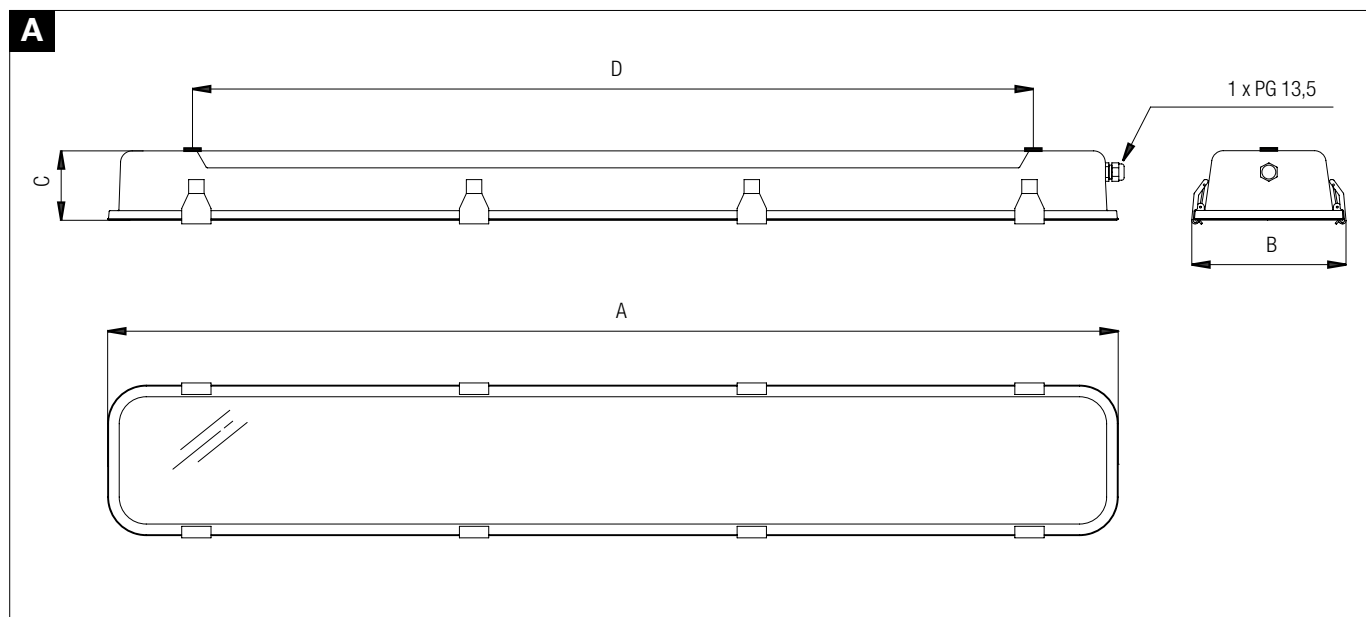

**REMARK:**

Due to the development of the national and international specifications and of the technology, the above technical characteristics showed on this bulletin can be considered as binding on our confirmation only.